



AGENDA INFORMATION **TIFFIN CITY COUNCIL COMMUNICATION**

DATE:	August 27, 2026
AGENDA ITEM:	Discussion and Consideration to Approve a Professional Service Agreement with the Iowa DOT for the Highway 6 Improvements Project
ACTION:	Motion

Background

The Iowa Department of Transportation and the City of Tiffin have been working jointly on improvements to U.S. 6 through Tiffin. The City and Iowa DOT previously entered into Agreement No. 2025-P-001 for predesign, which was executed by the City on March 7, 2025, and by the Iowa DOT on March 17, 2025. The proposed Preconstruction Agreement establishes the current project concept and identifies the responsibilities and cost-sharing obligations of both parties.

In addition to the primary highway improvements, the City has requested that the project incorporate several improvements within Tiffin, including:

- New storm sewer and associated appurtenances;
- New water main and associated appurtenances;
- Sidewalk improvements;
- Traffic signals at the intersection of U.S. 6 and Kimberlite Street;
- Widening of U.S. 6 pavement; and
- Extension of an existing box culvert.

These City-requested improvements will be incorporated into the Iowa DOT project and constructed as part of the overall project. The agreement provides that these requested improvements will be at no cost to the Iowa DOT beyond the City's identified cost-share responsibilities.

Under the agreement, the City will have several responsibilities associated with the project. The City will assist the Iowa DOT with inspection of the new water main and associated appurtenances. The City will also assume ownership and future maintenance responsibilities for the new water mains, traffic signals within the City's corporate boundaries, PCC sidewalks located outside Iowa DOT right-of-way, and the reconstructed portions of Main Street, Summerhays Street, Stephans Street, Croell Avenue, and Kimberlite Street.

The City will also be responsible for relocating City-owned utilities when necessary for construction and for providing certain City-owned property or right-of-way required for the project. The agreement specifically provides temporary access to City-owned property near the Park Road roundabout for construction of the new water main.

The City's estimated share of \$3,920,988.98 is comprised primarily of improvements that are the City's responsibility, along with the City's six-percent share of applicable storm sewer costs. Exhibit B identifies the project costs by division, with Division 1 funded 100% by the Iowa

DOT, Division 2 funded 100% by the City of Tiffin, and Division 3 stormwater items split 94% Iowa DOT / 6% City.

The agreement does not establish the City's final cost at \$3,920,988.98. This is an estimate. The City's actual reimbursement will be based on the quantities actually constructed, the accepted bid prices at the time of letting, and any additional work determined to be the City's responsibility.

The Iowa DOT will bill the City approximately twice per year, with the first reimbursement anticipated around July 1, 2027. Final billing will occur following completion of construction and verification of the City's total project share.

Recommendation

Staff requests that the City Council approve Iowa DOT Preconstruction Agreement No. 2026-4-131 for the U.S. 6 improvements in Tiffin and authorize the Mayor to execute the agreement on behalf of the City.

ATTACHMENTS: Agreement

**IOWA DEPARTMENT OF TRANSPORTATION
Preconstruction Agreement
For Primary Road Project**

County	Johnson
City	Tiffin
Project Nos.	STP-006-7(098)--2C-52 PCC Pavement - Grade & Replace STPN-006-7(101)--2J-52 PCC Sidewalk/Trail BRF-006-7(102)--38-52 RCB Culvert Replacement - Twin Box
Iowa DOT Agreement No.	2026-4-131
Staff Action No.	

This Agreement, is entered into by and between the Iowa Department of Transportation, hereinafter designated "DOT", and the city of Tiffin, Iowa, a Local Public Agency, hereinafter designated "LPA", in accordance with Iowa Code Chapters 28E.12, 306, 306A and 313.4 as applicable;

The DOT proposes to establish or make improvements to U.S. 6 within Johnson County, Iowa; and

The DOT and the LPA are willing to jointly participate in said project, in the manner hereafter provided; and

The DOT and the LPA previously entered into the following agreement for the above referenced projects: Agreement No. 2025-P-001 for Predesign was executed by the LPA and DOT on March 7, 2025 and March 17, 2025 respectively; and

This Agreement reflects the current concept of this project which is subject to modification by mutual agreement between the LPA and the DOT; and

Therefore, it is agreed as follows:

1. Project Information

- a. The LPA shall design; and the DOT shall acquire right of way, let, inspect construction, and perform contract administration for the following described projects in accordance with the project plans and DOT Standard Specifications:

STP-006-7(098)--2C-52: Portland cement concrete (PCC) pavement, grade and replace, on U.S. 6 in Tiffin from Grant Street to Park Road.

STPN-006-7(101)--2J-52: PCC sidewalk/trail along U.S. 6 in Tiffin from Roberts Ferry Road to Park Road.

BRF-006-7(102)--38-52: Reinforced concrete box (RCB) culvert replacement, twin box, on U.S. 6 in Tiffin located 0.2 miles east of Kimberlite Street.

See Exhibit A for project location.

- b. As part of the project, the LPA has requested construction of new storm sewers, water main and associated appurtenances, sidewalk, traffic signals at the intersection of U.S. 6 and Kimberlite Street, widening of the U.S. 6 pavement, and the extension of one existing box culvert within the city of Tiffin

and U.S. 6 and Croell Ave

all which shall be at no cost to the DOT. See Exhibit B for estimated costs.

- c. The LPA agrees to assist the DOT with inspection of construction of the new water main and associated appurtenances.
- d. In accordance with 761 Iowa Administrative Code Chapter 150.3(1)e, the LPA shall reimburse the DOT for its share (6%) of the actual cost for longitudinal and outlet storm sewer as shown on Exhibit B.
- e. All storm sewers constructed by the DOT as part of the project shall become the property of the LPA, which shall be responsible for their maintenance and operations. The LPA shall not make any connections to said storm sewers without the prior written approval of the DOT. The LPA shall prevent use of such storm sewers as a sanitary sewer.
- f. Upon completion of construction, the LPA agrees to retain ownership and jurisdiction of the following referenced improvements as identified below. The LPA shall also assume responsibility for all future maintenance operations associated therewith, all at no additional expense or obligation to the DOT:
 - i. Main Street shall be reconstructed from its intersection with U.S. 6 to 50 feet south of U.S. 6. A 24-foot wide PCC pavement with curb and gutter will be constructed.
 - ii. Summerhays Street shall be reconstructed from its intersection with U.S. 6 to 50 feet south of U.S. 6. A 24-foot wide PCC pavement with curb and gutter will be constructed.
 - iii. Stephans Street shall be reconstructed from its intersection with U.S. 6 to 50 feet south of U.S. 6, and from its intersection with U.S. 6 to 50 feet north of U.S. 6. A 24-foot wide PCC pavement with curb and gutter will be constructed.
 - iv. Croell Avenue shall be reconstructed from its intersection with U.S. 6 to 55 feet south of U.S. 6, and from its intersection with U.S. 6 to 50 feet north of U.S. 6. A 24-foot wide PCC pavement with curb and gutter will be constructed.
 - v. Kimberlite Street shall be reconstructed from its intersection with U.S. 6 to 55 feet south of U.S. 6, and from its intersection with U.S. 6 to 50 feet north of U.S. 6. A 24-foot wide PCC pavement with curb and gutter will be constructed.
 - vi. All water mains and associated appurtenances.
 - vii. Traffic signals at the intersection of U.S. 6 and Kimberlite Street.
 - viii. PCC sidewalks located outside of DOT right of way.

and U.S. 6 and Croell Ave

2. Project Costs

- a. The LPA shall reimburse the DOT for its share of the project costs estimated at \$3,920,988.98, as shown in Exhibit B. LPA reimbursements to the DOT shall occur approximately biannually, with the first reimbursement occurring around July 1, 2027. The amount paid by the LPA, based upon the accumulated construction completed and paid by the end of each biannual period, and billing by the DOT, shall be determined by the actual quantities in place, the accepted bid at the contract letting, and any extra work that is determined to be an LPA cost share. The final billing to the LPA will occur upon the completion of all construction and verification of the LPA's total share of the project costs, as determined by audit, less the previously reimbursed LPA costs.
- b. The DOT shall bear all costs except those allocated to the LPA under other terms of this Agreement.

3. Traffic Control

- a. The DOT shall temporarily close the highway project area by formal action in accordance with Iowa Code section 306.41. U.S. 6 through-traffic shall be detoured off the project by utilizing Roberts Ferry Road, Oakdale Boulevard, and Park Road. The LPA shall authorize the DOT to erect and maintain signs within its jurisdiction, consistent with Part 6 of the "Manual on Uniform Traffic Control Devices", as necessary, to direct traffic to and along said detour route during the construction period. The DOT shall also remove said signs when the detour is discontinued. Details shall be shown on the traffic control sheet(s) within the project plans. No separate detour agreement will be negotiated with the LPA, and the LPA will not be reimbursed for the use of LPA side roads as the detour route.
- b. It may be necessary to temporarily close LPA side road(s) Grant Street, Main Street, Summerhays Street, Stephans Street, Croell Avenue, and Kimberlite Street during construction. The DOT shall furnish and install the required barricades and signing for the closure(s) at project cost, and shall remove same upon completion of the project. The DOT shall work in close cooperation with the LPA and the contractor to accommodate emergency services and local access across the project during construction. Any detours, which may be necessary for project related LPA road closures, shall be the responsibility of the LPA, at no expense or obligation to the DOT.

4. Right of Way and Permits

- a. Subject to the provisions hereof, the LPA, in accordance with 761 Iowa Administrative Code Chapter 150.3(1)c and 150.4(2), shall remove or cause to be removed (within the corporate limits) all encroachments or obstructions located in the existing primary highway right of way. The LPA shall also prevent the erection and/or placement of any structure or obstruction within said right of way, or any additional right of way which is acquired for this project, including, but not limited to, private signs, buildings, pumps, and parking areas.
- b. The DOT shall be responsible for the coordination of utility facility adjustments for the primary road project.
- c. The LPA agrees to relocate all city-owned utilities necessary for construction, which are located within the existing street or alley right of way, subject to the approval of and without expense to the DOT in accordance with 761 Iowa Administrative Code Chapter 150.4(5) and the DOT Utility Accommodation Policy.
- d. With the exception of service connections, no new or future utility occupancy of project right of way, nor any future relocations of or alterations to existing utilities within said right of way, shall be permitted or undertaken by the LPA without the prior written approval of the DOT. All work shall be performed in accordance with the DOT Utility Accommodation Policy and other applicable requirements of the DOT.
- e. The LPA shall be responsible for providing, without cost to the DOT, any right of way for the project which involves dedicated streets or alleys, and any other LPA-owned lands which are required for the project, subject to the condition that the DOT shall reimburse the LPA for the value of LPA-owned improvements situated on such LPA-owned lands. The LPA has apprised itself of the value of these lands, and as a condition of their participation in the project, the LPA voluntarily agrees to make such lands available without further compensation. The DOT shall be responsible for acquisition of all other right of way.
- f. In connection with this project, any real estate and rights to real estate necessary for right of way at the connection of any public road and the primary highway project, any access road or frontage road, or any permanent utility easements, which are or which shall be under the jurisdiction of the LPA, may be acquired by the DOT, for and in the name of the LPA. Where acquired by contract, the LPA shall receive title from the contract seller and the LPA shall accept title thereto. Where acquired by condemnation, a single joint condemnation proceeding shall be instituted by the DOT to acquire real

estate or rights in real estate, needed by the LPA for the LPA, and to acquire real estate or rights in real estate, needed by the DOT for the DOT.

- g. The LPA owns a parcel of land near the Park Road roundabout where a new water main is planned to be constructed. The LPA agrees to provide the DOT with temporary access to this parcel, at no cost (mutual benefit), to perform the work necessary to construct the new water main and associated appurtenances. See Exhibit C for details of the planned work to occur on LPA-owned property.

5. Construction and Maintenance

- a. Upon completion of the project, no changes in the physical features thereof shall be undertaken or permitted without the prior written approval and consent of the DOT.
- b. Future maintenance of the primary highway within the project area shall be carried out in accordance with the terms and conditions contained in 761 Iowa Administrative Code Chapter 150.
- c. New traffic signal construction for this project shall be provided under guidelines established in 761 Iowa Administrative Code Chapter 150. If constructed, the LPA shall accept ownership of, and responsibility for future energy and maintenance costs of, those traffic signal units which lie within the corporate boundaries.

6. General Provisions

- a. If the LPA has completed a Flood Insurance Study (FIS) for an area which is affected by the proposed Primary Highway project, and the FIS is modified, amended, or revised in an area affected by the project after the date of this Agreement, the LPA shall provide notice of the modification, amendment, or revision to the DOT within 14 calendar days of the LPA's receipt of a subsequent FIS or modification. If the LPA does not have a detailed FIS for an area which is affected by the proposed Primary Highway project, and the LPA does adopt an FIS in an area affected by the project after the date of this Agreement, the LPA shall provide notice of the FIS to the DOT within 14 calendar days. The LPA agrees to defend, indemnify, and hold harmless the DOT from any and all claims, costs, and damages arising from, or related to, the LPA's failure to timely provide an FIS, and/or FIS modification, to the DOT in accordance with this provision.
- b. The LPA shall comply with all provisions of the equal employment opportunity requirements prohibiting discrimination and requiring affirmative action to assure equal employment opportunity as required by Title VI of the Civil Rights Act of 1964 and Iowa Code Chapter 216. No person shall, on the grounds of age, race, creed, color, sex, sexual orientation, national origin, religion, pregnancy, or disability, be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination under any program or activity for which State funds are used.
- c. It is the intent of both (all) parties that no third-party beneficiaries be created by this Agreement.
- d. If any section, provision, or part of this Agreement is found to be invalid or unconstitutional, such finding shall not affect the validity of the Agreement as a whole, or any section, provision, or part thereof not found to be invalid or unconstitutional, except to the extent that the original intent of the Agreement cannot be fulfilled.
- e. This Agreement, as well as the unaffected provisions of any previous agreement(s), addendum(s), and/or amendment(s), represents the entire Agreement between the LPA and DOT regarding this project. All previously executed agreements shall remain in effect except as amended herein. Any subsequent change or modification to the terms of this Agreement shall be in the form of a duly executed amendment to this document.

IN WITNESS WHEREOF, each of the parties hereto has executed Agreement No. 2026-4-131 as of the date shown opposite its signature below.

CITY OF TIFFIN:

By: _____ Date _____, 20____.
Title: Mayor


I, _____, certify that I am the Clerk of the City, and that
_____, who signed said Agreement for and on behalf of the
City was duly authorized to execute the same on the ____ day of _____, 20____.

Signed: _____
City Clerk of Tiffin, Iowa

IOWA DEPARTMENT OF TRANSPORTATION:

By: _____ Date _____, 20____.
Jesse Tibodeau, P.E.
District Engineer
District 6

Exhibit A: Project Location

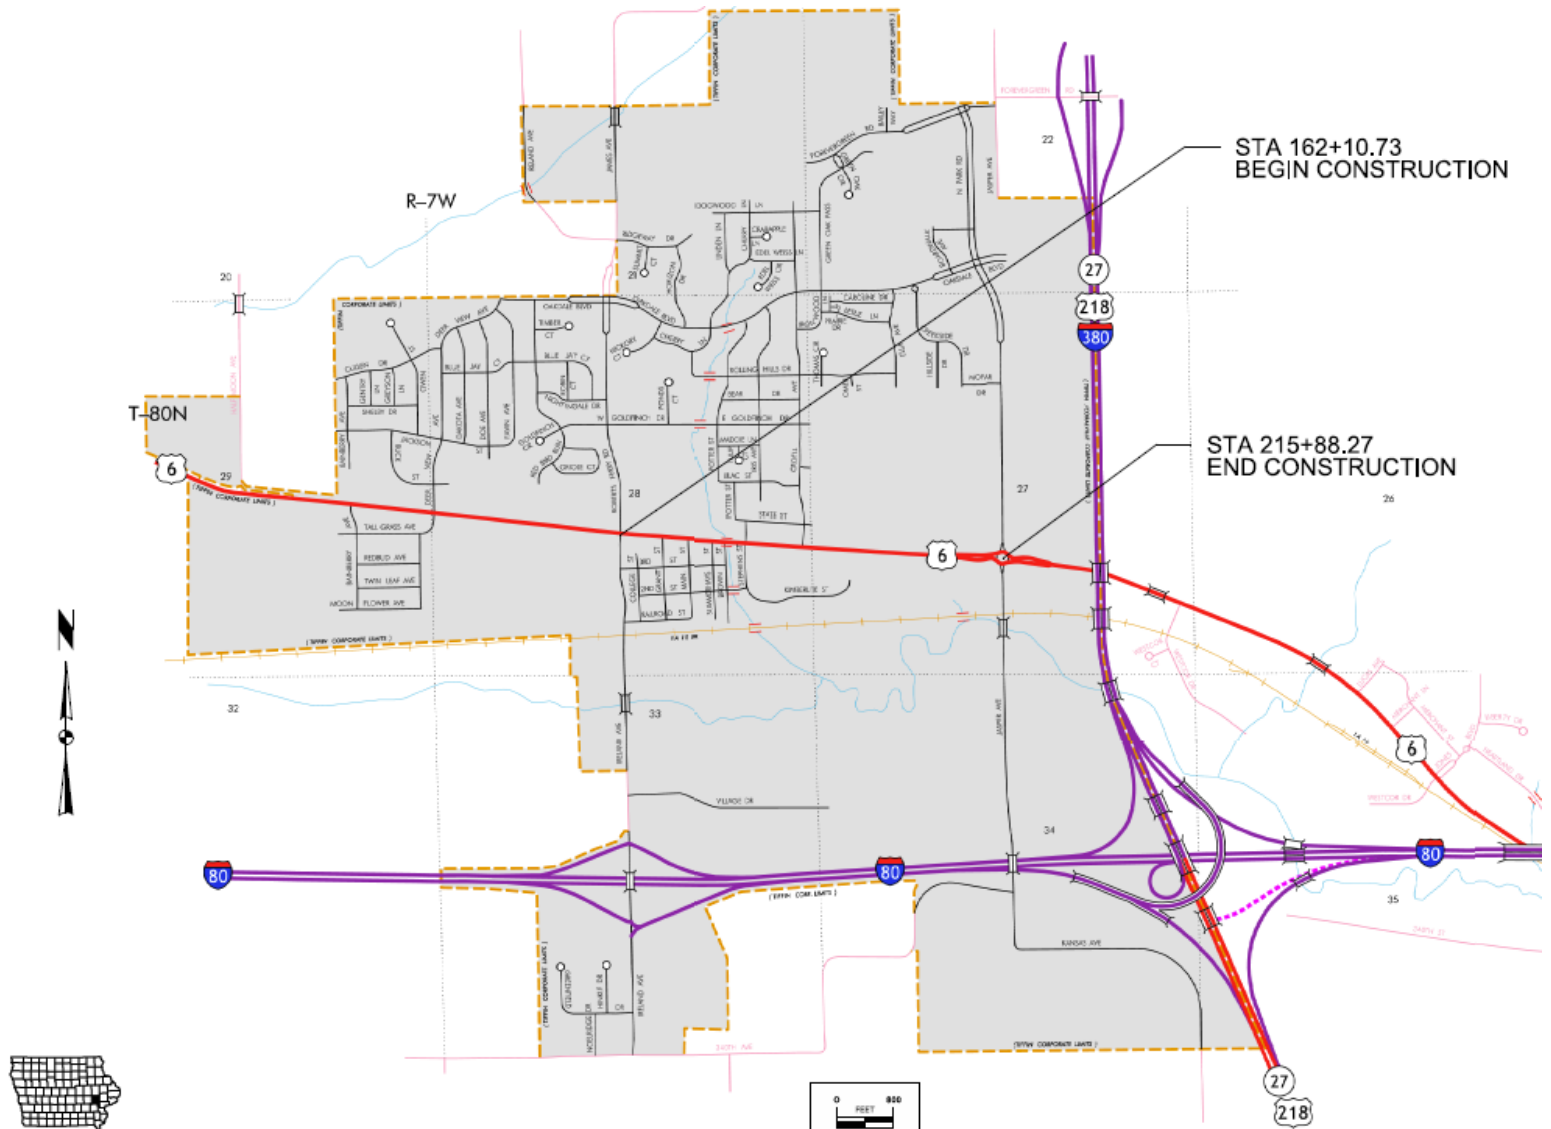

Ref: Project# STP-006-7(098)--2C-52

Exhibit B: Cost Estimate

#	Item Code	Item Description	Unit	Unit Price	Quantity	Total Cost	Division 1 - 100% Iowa DOT		Division 2 - 100% City of Tiffin		Division 3 - Stormwater Items (94% DOT, 6% City)	
							Quantity	Cost	Quantity	Cost	Quantity	Cost
1	2101-0850001	CLEARING AND GRUBBING	ACRE	27,000.00	0.11	\$2,970.00	0.01	\$270.00	0.10	\$2,700.00	0.00	\$0.00
2	2101-0850002	CLEARING AND GRUBBING	UNIT	100.00	1.6	\$160.00	0.00	\$0.00	1.60	\$160.00	0.00	\$0.00
3	2102-0425071	SPECIAL BACKFILL	CY	70.00	476	\$33,320.00	4.00	\$280.00	472.00	\$33,040.00	0.00	\$0.00
4	2102-2625001	EMBANKMENT-IN-PLACE, CONTRACTOR FURNISHED	CY	22.00	11604	\$255,288.00	6962.00	\$153,164.00	4642.00	\$102,124.00	0.00	\$0.00
5	2102-2710070	EXCAVATION, CLASS 10, ROADWAY AND BORROW	CY	12.00	5211	\$62,532.00	521.00	\$6,252.00	4690.00	\$56,280.00	0.00	\$0.00
6	2104-2710020	EXCAVATION, CLASS 10, CHANNEL	CY	13.00	326	\$4,238.00	0.00	\$0.00	326.00	\$4,238.00	0.00	\$0.00
7	2105-8425015	TOPSOIL, STRIP, SALVAGE AND SPREAD	CY	9.00	6755	\$60,795.00	1646.00	\$14,814.00	5109.00	\$45,981.00	0.00	\$0.00
8	2107-0425020	COMPACTING BACKFILL ADJACENT TO BRIDGES, CULVERTS OR STRUCTURES	CY	23.00	94.00	\$2,162.00	44.00	\$1,012.00	50.00	\$1,150.00	0.00	\$0.00
9	2115-0100000	MODIFIED SUBBASE	CY	58.00	4,502.00	\$261,116.00	2551.00	\$147,958.00	1951.00	\$113,158.00	0.00	\$0.00
10	2123-7450020	SHOULDER FINISHING, EARTH	STA	190.00	79.32	\$15,070.80	55.87	\$10,615.30	23.45	\$4,455.50	0.00	\$0.00
11	2301-1033100	STANDARD OR SLIP FORM PORTLAND CEMENT CONCRETE PAVEMENT, CLASS C, CLASS 3 DURABILITY, 10 IN. PAYMENT ADJUSTMENT INCENTIVE/DISINCENTIVE FOR PCC PAVEMENT THICKNESS (BY SCHEDULE)	SY	80.00	24270	\$1,941,600.00	13719.00	\$1,097,520.00	10551.00	\$844,080.00	0.00	\$0.00
12	2301-7000110	TEMPORARY PAVEMENT	EA	1.00	28396	\$28,396.00	16051.00	\$16,051.00	12345.00	\$12,345.00	0.00	\$0.00
13	2304-0101000	SURFACING, DRIVEWAY, CLASS C GRAVEL	SY	175.00	24.4	\$4,270.00	24.40	\$4,270.00	0.00	\$0.00	0.00	\$0.00
14	2315-8275030	PAYMENT ADJUSTMENT INCENTIVE/DISINCENTIVE FOR PCC PAVEMENT SMOOTHNESS (BY SCHEDULE)	TON	46.00	24.5	\$1,127.00	24.50	\$1,127.00	0.00	\$0.00	0.00	\$0.00
15	2317-7000110	REMOVAL OF EXISTING STRUCTURES	EA	1.00	18202	\$18,202.00	10289.00	\$10,289.00	7913.00	\$7,913.00	0.00	\$0.00
16	2401-6745650	REMOVALS, AS PER PLAN	LS	25,000.00	1	\$25,000.00	0.00	\$0.00	1.00	\$25,000.00	0.00	\$0.00
17	2401-6750001	FLOODED BACKFILL	LS	15,000.00	1	\$15,000.00	0.00	\$0.00	1.00	\$15,000.00	0.00	\$0.00
18	2402-0425040	EXCAVATION, CLASS 20	CY	63.00	251	\$15,813.00	131.40	\$8,278.20	119.60	\$7,534.80	0.00	\$0.00
19	2402-2720000	GRANULAR MATERIAL FOR BLANKET	CY	25.00	527	\$13,175.00	0.00	\$0.00	527.00	\$13,175.00	0.00	\$0.00
20	2402-3825025	STRUCTURAL CONCRETE (RCB CULVERT)	CY	89.00	90	\$8,010.00	0.00	\$0.00	90.00	\$8,010.00	0.00	\$0.00
21	2403-0100020	REINFORCING STEEL	CY	900.00	162.8	\$146,520.00	0.00	\$0.00	162.80	\$146,520.00	0.00	\$0.00
22	2404-7775000	STEEL PIPE PEDESTRIAN HAND RAILING	LB	1.80	22435	\$40,383.00	0.00	\$0.00	22435.00	\$40,383.00	0.00	\$0.00
23	2414-6444100	APRONS, CONCRETE, 15 IN. DIA.	LF	230.00	152.4	\$35,052.00	0.00	\$0.00	152.40	\$35,052.00	0.00	\$0.00
24	2416-0100015	APRONS, CONCRETE, 18 IN. DIA.	EA	1,550.00	3	\$4,650.00	0.00	\$0.00	0.00	\$0.00	3.00	\$4,650.00
25	2416-0100018	APRONS, CONCRETE, 24 IN. DIA.	EA	1,550.00	4	\$6,200.00	0.00	\$0.00	0.00	\$0.00	4.00	\$6,200.00
26	2416-0100024	CULVERT, CONCRETE ENTRANCE PIPE, 15 IN. DIA.	EA	2,300.00	5	\$11,500.00	0.00	\$0.00	0.00	\$0.00	5.00	\$11,500.00
27	2416-1160015	CULVERT, CONCRETE ENTRANCE PIPE, 18 IN. DIA.	LF	95.00	92	\$8,740.00	0.00	\$0.00	0.00	\$0.00	92.00	\$8,740.00
28	2416-1160018	TEMPORARY STREAM DIVERSION	LF	80.00	137	\$10,960.00	0.00	\$0.00	0.00	\$0.00	137.00	\$10,960.00
29	2418-0000010	MANHOLE, STORM SEWER, SW-401, 60 IN.	EA	30,000.00	3	\$90,000.00	1.00	\$30,000.00	2.00	\$60,000.00	0.00	\$0.00
30	2435-0140160	MANHOLE, STORM SEWER, SW-401, 72 IN.	EA	8,200.00	1	\$8,200.00	0.00	\$0.00	0.00	\$0.00	1.00	\$8,200.00
31	2435-0140172	INTAKE, SW-501	EA	12,400.00	1	\$12,400.00	0.00	\$0.00	0.00	\$0.00	1.00	\$12,400.00
32	2435-0250100	INTAKE, SW-502, 48 IN.	EA	5,100.00	1	\$5,100.00	0.00	\$0.00	0.00	\$0.00	1.00	\$5,100.00
33	2435-0250248	INTAKE, SW-502, 60 IN.	EA	5,900.00	1	\$5,900.00	0.00	\$0.00	0.00	\$0.00	1.00	\$5,900.00
34	2435-0250260	INTAKE, SW-507	EA	8,000.00	3	\$24,000.00	0.00	\$0.00	0.00	\$0.00	3.00	\$24,000.00
35	2435-0250700	INTAKE, SW-509	EA	8,000.00	19	\$152,000.00	0.00	\$0.00	0.00	\$0.00	19.00	\$152,000.00
36	2435-0250900	INTAKE, SW-513	EA	8,500.00	6	\$51,000.00	0.00	\$0.00	0.00	\$0.00	6.00	\$51,000.00
37	2435-0251300	INTAKE, SW-545	EA	6,000.00	5	\$30,000.00	0.00	\$0.00	0.00	\$0.00	5.00	\$30,000.00
38	2435-0254500	MANHOLE ADJUSTMENT, MINOR	EA	9,500.00	3	\$28,500.00	0.00	\$0.00	0.00	\$0.00	3.00	\$28,500.00
39	2435-0600010	MANHOLE ADJUSTMENT, MAJOR	EA	2,100.00	1	\$2,100.00	1.00	\$2,100.00	0.00	\$0.00	0.00	\$0.00
40	2435-0600020	CONNECTION TO EXISTING INTAKE	EA	3,800.00	1	\$3,800.00	1.00	\$3,800.00	0.00	\$0.00	0.00	\$0.00
41	2435-0700020	REMOVAL OF SUBDRAIN	EA	1,600.00	1	\$1,600.00	0.00	\$0.00	1.00	\$1,600.00	0.00	\$0.00
42	2502-6745952	SUBDRAIN, LONGITUDINAL, (SHOULDER) 6 IN. DIA.	LF	7.00	3311	\$23,177.00	3311.00	\$23,177.00	0.00	\$0.00	0.00	\$0.00
43	2502-8212036	SUBDRAIN OUTLET, DR-303	LF	17.00	8028	\$136,476.00	8028.00	\$136,476.00	0.00	\$0.00	0.00	\$0.00
44	2502-8221303	STORM SEWER GRAVITY MAIN, TRENCHED, REINFORCED CONCRETE PIPE (RCP), 2000D (CLASS III), 15 IN.	EA	340.00	64	\$21,760.00	64.00	\$21,760.00	0.00	\$0.00	0.00	\$0.00
45	2503-0114215	STORM SEWER GRAVITY MAIN, TRENCHED, REINFORCED CONCRETE PIPE (RCP), 2000D (CLASS III), 18 IN.	LF	103.00	1271	\$130,913.00	0.00	\$0.00	0.00	\$0.00	1271.00	\$130,913.00
46	2503-0114218	STORM SEWER GRAVITY MAIN, TRENCHED, REINFORCED CONCRETE PIPE (RCP), 2000D (CLASS III), 24 IN.	LF	102.00	1296	\$132,192.00	0.00	\$0.00	0.00	\$0.00	1296.00	\$132,192.00
47	2503-0114224	STORM SEWER GRAVITY MAIN, TRENCHED, REINFORCED CONCRETE PIPE (RCP), 3000D (CLASS IV), 15 IN.	LF	124.00	1625	\$201,500.00	0.00	\$0.00	0.00	\$0.00	1625.00	\$201,500.00
48	2503-0114415	REMOVE STORM SEWER PIPE LESS THAN OR EQUAL TO 36 IN.	LF	90.00	111	\$9,990.00	0.00	\$0.00	0.00	\$0.00	111.00	\$9,990.00
49	2503-0200036	REMOVAL OF STEEL BEAM GUARDRAIL	LF	27.00	944	\$25,488.00	0.00	\$0.00	0.00	\$0.00	944.00	\$25,488.00
50	2505-4008120	FLOWABLE MORTAR	LF	14.00	446	\$6,244.00	446.00	\$6,244.00	0.00	\$0.00	0.00	\$0.00
51	2506-4984000	ENGINEERING FABRIC	CY	310.00	40	\$12,400.00	0.00	\$0.00	0.00	\$0.00	40.00	\$12,400.00
52	2507-3250005	REVTMENT, CLASS E	SY	4.20	491	\$2,062.20	0.00	\$0.00	491.00	\$2,062.20	0.00	\$0.00
53	2507-6800061	REMOVAL OF PAVEMENT	TON	52.00	485	\$25,220.00	0.00	\$0.00	485.00	\$25,220.00	0.00	\$0.00
54	2510-6745850	REMOVAL OF INTAKES AND UTILITY ACCESSES	SY	12.00	20588	\$247,056.00	12663.00	\$151,956.00	7925.00	\$95,100.00	0.00	\$0.00
55	2510-6750600	REMOVAL OF SIDEWALK	EA	1,100.00	10	\$11,000.00	10.00	\$11,000.00	0.00	\$0.00	0.00	\$0.00
56	2511-6745900	SIDEWALK, P.C. CONCRETE, 4 IN.	SY	14.00	505	\$7,070.00	0.00	\$0.00	505.00	\$7,070.00	0.00	\$0.00
57	2511-7526004	SIDEWALK, P.C. CONCRETE, 6 IN.	SY	70.00	4028	\$281,960.00	0.00	\$0.00	4028.00	\$281,960.00	0.00	\$0.00
58	2511-7526006	DETECTABLE WARNINGS	SY	100.00	216	\$21,600.00	0.00	\$0.00	216.00	\$21,600.00	0.00	\$0.00
59	2511-7528101	CURB AND GUTTER, P.C. CONCRETE, 3.5 FT.	SF	54.00	339	\$18,306.00	0.00	\$0.00	339.00	\$18,306.00	0.00	\$0.00
60	2512-1725356	DRIVEWAY, P.C. CONCRETE, 6 IN.	LF	61.00	19	\$1,159.00	19.00	\$1,159.00	0.00	\$0.00	0.00	\$0.00
61	2515-2475006	REMOVAL OF PAVED DRIVEWAY	SY	78.00	95.9	\$7,480.20	95.90	\$7,480.20	0.00	\$0.00	0.00	\$0.00
62	2515-6745600	COMBINED CONCRETE SIDEWALK AND RETAINING WALL	SY	16.00	8.7	\$139.20	8.70	\$139.20	0.00	\$0.00	0.00	\$0.00
63	2516-8625000	FIELD OFFICE	CY	1,100.00	18	\$19,800.00	0.00	\$0.00	18.00	\$19,800.00	0.00	\$0.00
64	2520-3350015	REMOVE AND REINSTALL SIGN AS PER PLAN	EA	24,000.00	1	\$24,000.00	1.00	\$24,000.00	0.00	\$0.00	0.00	\$0.00
65	2524-6765010	REMOVE AND REINSTALL REFERENCE LOCATION SIGN	EA	275.00	21	\$5,775.00	21.00	\$5,775.00	0.00	\$0.00	0.00	\$0.00
66	2524-6765016	REMOVAL OF TYPE A SIGN ASSEMBLY	EA	250.00	1	\$250.00	1.00	\$250.00	0.00	\$0.00	0.00	\$0.00
67	2524-6765210	PERFORATED SQUARE STEEL TUBE POSTS	EA	150.00	13	\$1,950.00	13.00	\$1,950.00	0.00	\$0.00	0.00	\$0.00
68	2524-9276010	PERFORATED SQUARE STEEL TUBE POST ANCHOR, BREAK-AWAY SOIL INSTALLATION	LF	20.00	104	\$2,080.00	104.00	\$2,080.00	0.00	\$0.00	0.00	\$0.00
69	2524-9276021		EA	120.00	12	\$1,440.00	12.00	\$1,440.00	0.00	\$0.00	0.00	\$0.00


Exhibit B: Cost Estimate

#	Item Code	Item Description	Unit	Unit Price	Quantity	Total Cost	Division 1 - 100% Iowa DOT		Division 2 - 100% City of Tiffin		Division 3 - Stormwater Items (94% DOT, 6% City)	
							Quantity	Cost	Quantity	Cost	Quantity	Cost
70	2524-9325001	TYPE A SIGNS, SHEET ALUMINUM	SF	31.00	192.7	\$5,973.70	192.70	\$5,973.70	0.00	\$0.00	0.00	\$0.00
71	2525-0000100	TRAFFIC SIGNALIZATION	LS	480,000.00	1	\$480,000.00	0.00	\$0.00	1.00	\$480,000.00	0.00	\$0.00
72	2526-8285010	CONSTRUCTION SURVEY, MONUMENT PRESERVATION	LS	4,000.00	1	\$4,000.00	0.50	\$2,000.00	0.50	\$2,000.00	0.00	\$0.00
73	2526-8285020	CONSTRUCTION SURVEY, CONTROL POINT SURVEY	LS	4,000.00	1	\$4,000.00	0.50	\$2,000.00	0.50	\$2,000.00	0.00	\$0.00
74	2526-8285040	CONSTRUCTION SURVEY, LOCATION SURVEY	LS	35,000.00	1	\$35,000.00	0.50	\$17,500.00	0.50	\$17,500.00	0.00	\$0.00
75	2527-9263137	PAINTED SYMBOLS AND LEGENDS, WATERBORNE OR SOLVENT-BASED	EA	115.00	49	\$5,635.00	49.00	\$5,635.00	0.00	\$0.00	0.00	\$0.00
76	2527-9263181	PAVEMENT MARKINGS REMOVED	STA	185.00	23.04	\$4,262.40	23.04	\$4,262.40	0.00	\$0.00	0.00	\$0.00
77	2527-9263209	PAINTED PAVEMENT MARKINGS, WATERBORNE OR SOLVENT-BASED	STA	65.00	170.97	\$11,113.05	170.97	\$11,113.05	0.00	\$0.00	0.00	\$0.00
78	2527-9263231	REMOVABLE TAPE MARKINGS, WET RETROREFLECTIVE	STA	245.00	3.44	\$842.80	3.44	\$842.80	0.00	\$0.00	0.00	\$0.00
79	2528-2518000	SAFETY CLOSURE	EA	185.00	18	\$3,330.00	9.00	\$1,665.00	9.00	\$1,665.00	0.00	\$0.00
80	2528-5160000	NO EXCUSE ROAD OPENING BONUS, U.S. 6 STAGES 1 AND 2 ON OR BEFORE NOVEMBER 19, 2027	LS	50,000.00	1	\$50,000.00	1.00	\$50,000.00	0.00	\$0.00	0.00	\$0.00
81	2528-8445110	TRAFFIC CONTROL	LS	335,000.00	1	\$335,000.00	0.50	\$167,500.00	0.50	\$167,500.00	0.00	\$0.00
82	2528-9290050	PORTABLE DYNAMIC MESSAGE SIGN (PDMS)	CDAY	150.00	0	\$0.00	0.00	\$0.00	0.00	\$0.00	0.00	\$0.00
83	2533-4980005	MOBILIZATION	LS	335,000.00	1	\$335,000.00	0.50	\$167,500.00	0.50	\$167,500.00	0.00	\$0.00
84	2552-0000300	TRENCH COMPACTION TESTING	LS	2,650.00	1	\$2,650.00	0.50	\$1,325.00	0.50	\$1,325.00	0.00	\$0.00
85	2554-0114008	WATER MAIN, TRENCHED, POLYVINYL CHLORIDE PIPE (PVC), 8 IN.	LF	140.00	2553	\$357,420.00	0.00	\$0.00	2553.00	\$357,420.00	0.00	\$0.00
86	2554-0134008	WATER MAIN WITH CASING PIPE, TRENCHED, POLYVINYL CHLORIDE PIPE (PVC), 8 IN.	LF	230.00	123	\$28,290.00	0.00	\$0.00	123.00	\$28,290.00	0.00	\$0.00
87	2554-0203000	FITTINGS BY WEIGHT, DUCTILE IRON	LB	22.00	1060	\$23,320.00	0.00	\$0.00	1060.00	\$23,320.00	0.00	\$0.00
88	2554-0204220	WATER SERVICE STUB, PVC, 2 IN.	EA	3,000.00	1	\$3,000.00	0.00	\$0.00	1.00	\$3,000.00	0.00	\$0.00
89	2554-0207006	VALVE, GATE, DIP, 6 IN.	EA	2,540.00	3	\$7,620.00	3.00	\$7,620.00	0.00	\$0.00	0.00	\$0.00
90	2554-0207008	VALVE, GATE, DIP, 8 IN.	EA	3,310.00	10	\$33,100.00	0.00	\$0.00	10.00	\$33,100.00	0.00	\$0.00
91	2554-0209006	VALVE REMOVAL, 6 IN.	EA	460.00	3	\$1,380.00	3.00	\$1,380.00	0.00	\$0.00	0.00	\$0.00
92	2554-0210201	FIRE HYDRANT ASSEMBLY, WM-201	EA	11,700.00	7	\$81,900.00	0.00	\$0.00	7.00	\$81,900.00	0.00	\$0.00
93	2554-0211008	FLUSHING DEVICE (BLOWOFF), 8 IN.	EA	2,100.00	1	\$2,100.00	0.00	\$0.00	1.00	\$2,100.00	0.00	\$0.00
94	2554-0212040	VALVE BOX ADJUSTMENT, MINOR	EA	535.00	4	\$2,140.00	4.00	\$2,140.00	0.00	\$0.00	0.00	\$0.00
95	2554-0214000	FIRE HYDRANT ADJUSTMENT	EA	2,580.00	2	\$5,160.00	2.00	\$5,160.00	0.00	\$0.00	0.00	\$0.00
96	2555-0000010	DELIVER AND STOCKPILE SALVAGED MATERIALS	LS	3,000.00	1	\$3,000.00	0.00	\$0.00	1.00	\$3,000.00	0.00	\$0.00
97	2599-9999005	('EACH' ITEM) CONNECTION TO EXISTING WATER MAIN	EA	4,240.00	2	\$8,480.00	0.00	\$0.00	2.00	\$8,480.00	0.00	\$0.00
98	2599-9999005	('EACH' ITEM) SUBDRAIN CLEANOUT, TYPE B	EA	2,140.00	4	\$8,560.00	4.00	\$8,560.00	0.00	\$0.00	0.00	\$0.00
99	2599-9999010	('LUMP SUM' ITEM) ROADWAY LIGHTING SYSTEM	LS	300,000.00	1	\$300,000.00	0.00	\$0.00	1.00	\$300,000.00	0.00	\$0.00
100	2601-2634105	MULCHING, BONDED FIBER MATRIX	ACRE	2,800.00	7	\$19,600.00	1.70	\$4,760.00	5.30	\$14,840.00	0.00	\$0.00
101	2601-2636044	SEEDING AND FERTILIZING (URBAN)	ACRE	1,650.00	5	\$8,250.00	1.20	\$1,980.00	3.80	\$6,270.00	0.00	\$0.00
102	2601-2638352	SLOPE PROTECTION, WOOD EXCELSIOR MAT	SQ	12.00	192	\$2,304.00	0.00	\$0.00	192.00	\$2,304.00	0.00	\$0.00
103	2601-2639010	SODDING	SQ	65.00	335.6	\$21,814.00	81.80	\$5,317.00	253.80	\$16,497.00	0.00	\$0.00
104	2601-2640350	SPECIAL DITCH CONTROL, WOOD EXCELSIOR MAT	SQ	30.00	27.4	\$822.00	0.00	\$0.00	27.40	\$822.00	0.00	\$0.00
105	2601-2642120	STABILIZING CROP - SEEDING AND FERTILIZING (URBAN)	ACRE	300.00	2	\$600.00	0.50	\$150.00	1.50	\$450.00	0.00	\$0.00
106	2601-2643110	WATERING FOR SOD, SPECIAL DITCH CONTROL, OR SLOPE PROTECTION	1000 Gallons	75.00	245.24	\$18,393.00	49.08	\$3,681.00	196.16	\$14,712.00	0.00	\$0.00
107	2601-2643300	MOBILIZATION FOR WATERING	EA	450.00	13	\$5,850.00	5.00	\$2,250.00	8.00	\$3,600.00	0.00	\$0.00
108	2602-0000020	SILT FENCE	LF	1.60	1600	\$2,560.00	30.00	\$48.00	1570.00	\$2,512.00	0.00	\$0.00
109	2602-0000030	SILT FENCE FOR DITCH CHECKS	LF	1.70	930	\$1,581.00	810.00	\$1,377.00	120.00	\$204.00	0.00	\$0.00
110	2602-0000071	REMOVAL OF SILT FENCE OR SILT FENCE FOR DITCH CHECKS	LF	0.10	1270	\$127.00	420.00	\$42.00	850.00	\$85.00	0.00	\$0.00
111	2602-0000101	MAINTENANCE OF SILT FENCE OR SILT FENCE FOR DITCH CHECK	LF	0.50	253	\$126.50	84.00	\$42.00	169.00	\$84.50	0.00	\$0.00
112	2602-0000150	STABILIZED CONSTRUCTION ENTRANCE, EC-303	LF	63.00	1700	\$107,100.00	850.00	\$53,550.00	850.00	\$53,550.00	0.00	\$0.00
113	2602-0000312	PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 12 IN. DIA.	LF	2.40	11370	\$27,288.00	5710.00	\$13,704.00	5660.00	\$13,584.00	0.00	\$0.00
114	2602-0000320	PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 20 IN. DIA.	LF	5.20	250	\$1,300.00	0.00	\$0.00	250.00	\$1,300.00	0.00	\$0.00
115	2602-0000351	REMOVAL OF PERIMETER AND SLOPE OR DITCH CHECK SEDIMENT CONTROL DEVICE	LF	0.20	12150	\$2,430.00	5840.00	\$1,168.00	6310.00	\$1,262.00	0.00	\$0.00
116	2602-0000370	DITCH CHECK SEDIMENT CONTROL DEVICE, 20 IN. DIA.	LF	5.60	530	\$2,968.00	130.00	\$728.00	400.00	\$2,240.00	0.00	\$0.00
117	2602-0000500	OPEN-THROAT CURB INTAKE SEDIMENT FILTER, EC-602	LF	13.00	278	\$3,614.00	179.00	\$2,327.00	99.00	\$1,287.00	0.00	\$0.00
118	2602-0000510	MAINTENANCE OF OPEN-THROAT CURB INTAKE SEDIMENT FILTER	EA	11.00	42	\$462.00	27.00	\$297.00	15.00	\$165.00	0.00	\$0.00
119	2602-0000520	REMOVAL OF OPEN-THROAT CURB INTAKE SEDIMENT FILTER	EA	9.00	42	\$378.00	27.00	\$243.00	15.00	\$135.00	0.00	\$0.00
120	2602-0000530	GRATE INTAKE SEDIMENT FILTER BAG, EC-604	EA	135.00	6	\$810.00	5.00	\$675.00	1.00	\$135.00	0.00	\$0.00
121	2602-0000540	MAINTENANCE OF GRATE INTAKE SEDIMENT FILTER BAG	EA	15.00	6	\$90.00	5.00	\$75.00	1.00	\$15.00	0.00	\$0.00
122	2602-0000550	REMOVAL OF GRATE INTAKE SEDIMENT FILTER BAG	EA	12.00	6	\$72.00	5.00	\$60.00	1.00	\$12.00	0.00	\$0.00
123	2602-0010010	MOBILIZATIONS, EROSION CONTROL	EA	600.00	1	\$600.00	0.50	\$300.00	0.50	\$300.00	0.00	\$0.00
124	2602-0010020	MOBILIZATIONS, EMERGENCY EROSION CONTROL	EA	1,200.00	1	\$1,200.00	0.50	\$600.00	0.50	\$600.00	0.00	\$0.00
125	2612-0000520	ROADSIDE SPRAY FOR WEED CONTROL	ACRE	160.00	5	\$800.00	1.20	\$192.00	3.80	\$608.00	0.00	\$0.00
Sub-Total Divisions						\$7,198,753.85		\$2,458,429.85		\$3,868,691.00		\$871,633.00
DOT Split of Division 3 Stormwater (0.94)								\$819,335.02				
City Split of Division 3 Stormwater (0.06)										\$52,297.98		
Sub-Total STP-006-7(098)--2C-52						\$7,198,753.85		\$3,277,764.87		\$3,920,988.98		
126	2102-0425071	SPECIAL BACKFILL	CY		70	\$5,600.00		\$0.00		\$0.00		\$0.00
127	2510-6745850	REMOVAL OF PAVEMENT	SY		12	\$1,176.00		\$0.00		\$0.00		\$0.00
128	2511-6745900	REMOVAL OF SIDEWALK	SY		14	\$8,834.00		\$0.00		\$0.00		\$0.00
129	2511-7526004	SIDEWALK, P.C. CONCRETE, 4 IN.	SY		70	\$50,610.00		\$0.00		\$0.00		\$0.00
130	2511-7528101	DETECTABLE WARNINGS	SF		54	\$5,400.00		\$0.00		\$0.00		\$0.00
131	2512-1725356	CURB AND GUTTER, P.C. CONCRETE, 3.5 FT.	LF		61	\$17,873.00		\$0.00		\$0.00		\$0.00
132	2514-0000200	REMOVAL OF CURB	STA		5730	\$16,788.90		\$0.00		\$0.00		\$0.00
133	2515-2475006	DRIVEWAY, P.C. CONCRETE, 6 IN.	SY		78	\$12,948.00		\$0.00		\$0.00		\$0.00
134	2515-6745600	REMOVAL OF PAVED DRIVEWAY	SY		16	\$1,200.00		\$0.00		\$0.00		\$0.00
135	2526-8285040	CONSTRUCTION SURVEY, LOCATION SURVEY	LS		5000	\$5,000.00		\$0.00		\$0.00		\$0.00

Exhibit B: Cost Estimate

#	Item Code	Item Description	Unit	Unit Price	Quantity	Total Cost	Division 1 - 100% Iowa DOT		Division 2 - 100% City of Tiffin		Division 3 - Stormwater Items (94% DOT, 6% City)	
							Quantity	Cost	Quantity	Cost	Quantity	Cost
136	2528-8445110	TRAFFIC CONTROL	LS	8000	1	\$8,000.00	1.00	\$8,000.00	0.00	\$0.00		
137	2529-5070110	PATCHES, FULL-DEPTH FINISH, BY AREA	SY	260	35	\$9,100.00	35.00	\$9,100.00	0.00	\$0.00		
138	2529-5070111	PATCHES, FULL-DEPTH FINISH, BY AREA (50 FEET OR GREATER IN LENGTH)	SY	260	63	\$16,380.00	63.00	\$16,380.00	0.00	\$0.00		
139	2529-5070120	PATCHES, FULL-DEPTH FINISH, BY COUNT	EA	250	6	\$1,500.00	6.00	\$1,500.00	0.00	\$0.00		
140	2533-4980005	MOBILIZATION	LS	8000	1	\$8,000.00	1.00	\$8,000.00	0.00	\$0.00		
141	2601-2638352	SLOPE PROTECTION, WOOD EXCELSIOR MAT	SQ	10	26.1	\$261.00	26.10	\$261.00	0.00	\$0.00		
142	2601-2643110	WATERING FOR SOD, SPECIAL DITCH CONTROL, OR SLOPE PROTECTION	1000 Gallons	75	5.22	\$391.50	5.22	\$391.50	0.00	\$0.00		
143	2601-2643300	MOBILIZATION FOR WATERING	EA	450	3	\$1,350.00	3.00	\$1,350.00	0.00	\$0.00		
144	2602-0000309	PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 9 IN. DIA.	LF	2.2	260	\$572.00	260.00	\$572.00	0.00	\$0.00		
145	2602-0000312	PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 12 IN. DIA.	LF	2.4	750	\$1,800.00	750.00	\$1,800.00	0.00	\$0.00		
146	2602-0000351	REMOVAL OF PERIMETER AND SLOPE OR DITCH CHECK SEDIMENT CONTROL DEVICE	LF	0.2	1010	\$202.00	1010.00	\$202.00	0.00	\$0.00		
147	2602-0000500	OPEN-THROAT CURB INTAKE SEDIMENT FILTER, EC-602	LF	13	72	\$936.00	72.00	\$936.00	0.00	\$0.00		
148	2602-0000510	MAINTENANCE OF OPEN-THROAT CURB INTAKE SEDIMENT FILTER	EA	11	8	\$88.00	8.00	\$88.00	0.00	\$0.00		
149	2602-0000520	REMOVAL OF OPEN-THROAT CURB INTAKE SEDIMENT FILTER	EA	9	8	\$72.00	8.00	\$72.00	0.00	\$0.00		
150	2602-0000530	GRATE INTAKE SEDIMENT FILTER BAG, EC-604	EA	135	1	\$135.00	1.00	\$135.00	0.00	\$0.00		
151	2602-0000540	MAINTENANCE OF GRATE INTAKE SEDIMENT FILTER BAG	EA	15	1	\$15.00	1.00	\$15.00	0.00	\$0.00		
152	2602-0000550	REMOVAL OF GRATE INTAKE SEDIMENT FILTER BAG	EA	12	1	\$12.00	1.00	\$12.00	0.00	\$0.00		
153	2602-0010010	MOBILIZATIONS, EROSION CONTROL	EA	600	1	\$600.00	1.00	\$600.00	0.00	\$0.00		
154	2602-0010020	MOBILIZATIONS, EMERGENCY EROSION CONTROL	EA	1200	1	\$1,200.00	1.00	\$1,200.00	0.00	\$0.00		
Sub-Total STPN-006-7(101)--2J-52						\$176,044.40	\$176,044.40		\$0.00			
155	2104-2710020	EXCAVATION, CLASS 10, CHANNEL	CY	13	191	\$2,483.00	191.00	\$2,483.00	0.00	\$0.00		
156	2401-6745650	REMOVAL OF EXISTING STRUCTURES	LS	40000	1	\$40,000.00	1.00	\$40,000.00	0.00	\$0.00		
157	2402-2720000	EXCAVATION, CLASS 20	CY	25	878	\$21,950.00	878.00	\$21,950.00	0.00	\$0.00		
158	2402-3825025	GRANULAR MATERIAL FOR BLANKET	CY	89	123	\$10,947.00	123.00	\$10,947.00	0.00	\$0.00		
159	2403-0100020	STRUCTURAL CONCRETE (RCB CULVERT)	CY	850	244.1	\$207,485.00	244.10	\$207,485.00	0.00	\$0.00		
160	2404-7775000	REINFORCING STEEL	LB	1.8	36100	\$64,980.00	36100.00	\$64,980.00	0.00	\$0.00		
161	2414-6444100	STEEL PIPE PEDESTRIAN HAND RAILING	LF	230	119	\$27,370.00	119.00	\$27,370.00	0.00	\$0.00		
162	2507-3250005	ENGINEERING FABRIC	SY	4.2	288	\$1,209.60	288.00	\$1,209.60	0.00	\$0.00		
163	2507-6800061	REVTMENT, CLASS E	TON	70	286	\$20,020.00	286.00	\$20,020.00	0.00	\$0.00		
164	2526-8285040	CONSTRUCTION SURVEY, LOCATION SURVEY	LS	7500	1	\$7,500.00	1.00	\$7,500.00	0.00	\$0.00		
165	2533-4980005	MOBILIZATION	LS	44882.7	1	\$44,882.70	1.00	\$44,882.70	0.00	\$0.00		
Sub-Total BRF-006-7(102)--38-52						\$448,827.30	\$448,827.30		\$0.00			
TOTAL Project						\$7,823,625.55	\$3,902,636.57		\$3,920,988.98			

Exhibit C: Work on City Property

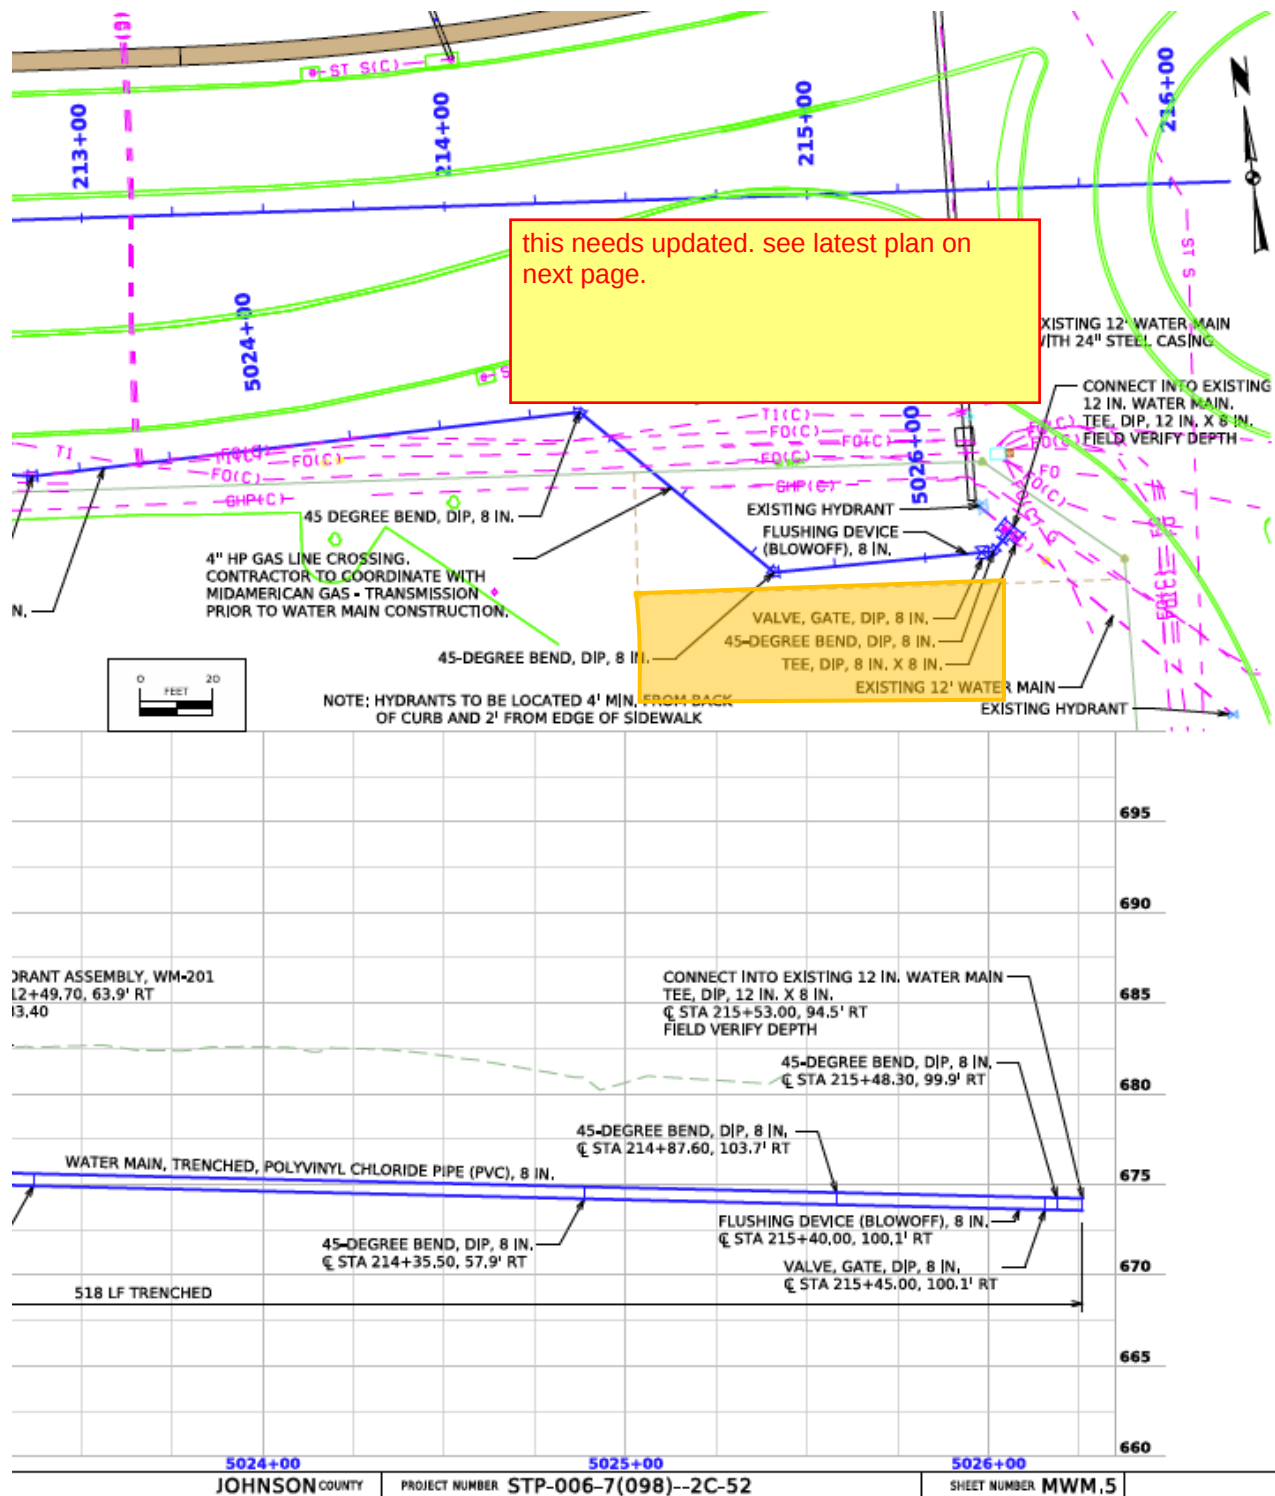

Area to be accessed on city property for water main construction

Ref: Project# STP-006-7(098)--2C-52

